



Electrical & Automation

POWERING A NON-STOP INDIA

LOW VOLTAGE | INDUSTRIAL AUTOMATION | SOFTWARE SOLUTIONS



Maximum Retail Prices
For Final Distribution Products
Effective from 01-03-26



FROM THE COO'S DESK.



Electrical & Automation

Dear Partner,

Your continued trust and partnership have been the cornerstone of our journey. Building on a legacy of over 70 years, and following our refreshed identity last year, we remain focused on delivering **innovative, reliable, and high-quality products** that power progress.

As part of this journey, we are pleased to **share an updated price list**. This revision reflects our ongoing commitment to **transparency, quality, and excellence**, ensuring you continue to receive the best value and service.

At Lauritz Knudsen, our philosophy remains simple yet powerful: **We listen. We partner. We innovate.**

These words guide our actions and shape the way we grow - together.

We look forward to continuing our collaboration and powering up homes, industries, farms, infrastructure, businesses, and lives - with you by our side.

Wishing you a joyful festive season and continued success.

A handwritten signature in blue ink that reads "Naresh Kumar".

Warm regards,
Naresh Kumar
COO & Sr. VP, Electrical Standard Products
Lauritz Knudsen Electrical & Automation



Lauritz Knudsen Electrical & Automation Final Distribution Products

Lauritz Knudsen's Exora range of modular devices offer MCB, RCCB, Isolator & DB for final distribution of electrical power. Lauritz Knudsen's products are better known for reliability, functionality & ease of use.



Lauritz Knudsen products conform to relevant global standards viz. IEC, EN. They also have BIS, CE marking, CB and KEMA certification.

Contents

MCB - Miniature Circuit Breaker	2
Isolators, RCCBs	6
RCBOs - Residual Current Breaker with Overcurrent Protection	8
Other Protection & Control Devices	9
Industrial Plugs & Sockets	11
Distribution Boards	12



Note:

[Black colour : HSN code]


Current GST 18%, subject to changes as per Govt. notification





Safety re-defined

Finger proof terminals eliminate chances of accidental contact with live part. You can install, operate and maintain modular device with total confidence.



Energy limiting class - 3

If fault occurs, the Rapid Arc Quenching mechanism in modular device operates and extinguishes the arc quickly (within 3-5 msec), ensuring lowest possible energy flow through the circuit. This minimize risk of fire and maximizes life of your equipment.



Safety meets superior aesthetics

Ergonomically designed, profiled for superior cooling and manufactured with fire retardant material. Modular device is brought to you keeping in mind utmost user safety.

Key Benefits



True contact indication

E&A modular device range enhances safety through true contact indication even from a distance regardless of its mounting and knob position. Red and Green indication tags provided below the knob positively identify the electrical ON/OFF status, reflecting actual contact status.



Integrated label holder

E&A MCBs are equipped with label holder for easy identification of circuit during operation as well as in maintenance.




Innovatively profiled breathing channels

When two or more poles are placed adjacent to each other, the breathing channels are so profiled that the air circulates around individual pole, resulting in cooler operation.




Large terminal size and Biconnect

Exora MCB's can easily accommodate cables of up to 35 sq.mm. Biconnect terminals offer convenience of connecting both cable and bus bar.



Two position DIN rail clip

Installation on a DIN rail is further simplified with a two-position DIN rail clip as a standard feature. E&A MCB range makes mounting on a standard DIN rail more convenient .



Non-welding contacts

Silver Graphite contact tips ensure higher life and maximum safety against contact welding due to its superior anti-welding properties, enhancing safety and life of the system.



Combihead screw

E&A modular devices with combihead screws, allow you to use standard as well as Philips head screw drivers. E&A modular device range addresses your undefined needs.



Miniature Circuit Breaker (MCB) [8536]

Range Highlights

- › True contact indication for individual pole
- › Label holder facility for all configurations
- › Conforms to IS/IEC 60898 - 10kA
- › Conforms to IS/IEC 60947 - 2
 - › 15kA C-curve till 40 A
 - › 10kA C-curve for 50A, 63A
- › Available in B, C & D curves
- › Low watt loss - almost 50% of the values prescribed by IS/IEC 60898
- › Trip free mechanism
- › Design based on advanced current limiting hammer trip mechanism
- › No Line-Load bias
- › Bi connect feature on both sides
- › Suitable for accessory fitment



Rating	Modules 1 Mod = 17.5 mm	B-Curve Cat. No.	M.R.P. (₹) Per Unit	C-Curve Cat. No.	M.R.P. (₹) Per Unit	D-Curve Cat. No.	M.R.P. (₹) Per Unit
Single Pole (SP)							
0.5A	1	-	-	BB10E50C	540	BB10E50D	560
1A	1	-	-	BB10010C	540	BB10010D	560
2A	1	-	-	BB10020C	540	BB10020D	560
3A	1	-	-	BB10030C	540	BB10030D	560
4A	1	-	-	BB10040C	540	BB10040D	560
6A	1	BB10060B	318	BB10060C	318	BB10060D	470
10A	1	BB10100B	318	BB10100C	318	BB10100D	470
16A	1	BB10160B	318	BB10160C	318	BB10160D	470
20A	1	BB10200B	318	BB10200C	318	BB10200D	470
25A	1	BB10250B	318	BB10250C	318	BB10250D	470
32A	1	BB10320B	318	BB10320C	318	BB10320D	470
40A	1	BB10400B	756	BB10400C	756	BB10400D	840
50A	1	BB10500B	756	BB10500C	756	BB10500D*	840
63A	1	BB10630B	756	BB10630C	756	BB10630D*	840
Double Pole (DP)							
0.5A	2	-	-	BB20E50C	1550	BB20E50D	1575
1A	2	-	-	BB20010C	1550	BB20010D	1575
2A	2	-	-	BB20020C	1550	BB20020D	1575
3A	2	-	-	BB20030C	1550	BB20030D	1575
4A	2	-	-	BB20040C	1550	BB20040D	1575
6A	2	BB20060B	1080	BB20060C	1080	BB20060D	1145
10A	2	BB20100B	1080	BB20100C	1080	BB20100D	1145
16A	2	BB20160B	1080	BB20160C	1080	BB20160D	1145
20A	2	BB20200B	1080	BB20200C	1080	BB20200D	1145
25A	2	BB20250B	1080	BB20250C	1080	BB20250D	1145
32A	2	BB20320B	1080	BB20320C	1080	BB20320D	1145
40A	2	BB20400B	1760	BB20400C	1760	BB20400D	1870
50A	2	BB20500B	1760	BB20500C	1760	BB20500D*	1870
63A	2	BB20630B	1760	BB20630C	1760	BB20630D*	1870
Three Pole (TP)							
0.5A	3	-	-	BB30E50C	2255	BB30E50D	2290
1A	3	-	-	BB30010C	2255	BB30010D	2290
2A	3	-	-	BB30020C	2255	BB30020D	2290
3A	3	-	-	BB30030C	2255	BB30030D	2290
4A	3	-	-	BB30040C	2255	BB30040D	2290
6A	3	BB30060B	1700	BB30060C	1700	BB30060D	1825
10A	3	BB30100B	1700	BB30100C	1700	BB30100D	1825
16A	3	BB30160B	1700	BB30160C	1700	BB30160D	1825
20A	3	BB30200B	1700	BB30200C	1700	BB30200D	1825
25A	3	BB30250B	1700	BB30250C	1700	BB30250D	1825
32A	3	BB30320B	1700	BB30320C	1700	BB30320D	1825
40A	3	BB30400B	2650	BB30400C	2650	BB30400D	2825
50A	3	BB30500B	2650	BB30500C	2650	BB30500D*	2825
63A	3	BB30630B	2650	BB30630C	2650	BB30630D*	2825

Note: Standard Pack Quantity for MCB : SP - 12 Nos., DP - 6 Nos., TP - 4 Nos., FP - 3 Nos.

*For details, please contact nearest branch office

Miniature Circuit Breaker (MCB) [8536]



Rating	Modules 1 Mod = 17.5 mm	B-Curve Cat. No.	M.R.P. (₹) Per Unit	C-Curve Cat. No.	M.R.P. (₹) Per Unit	D-Curve Cat. No.	M.R.P. (₹) Per Unit
Four Pole (FP)							
0.5A	4	-	-	BB40E50C	2840	BB40E50D	2845
1A	4	-	-	BB40010C	2840	BB40010D	2845
2A	4	-	-	BB40020C	2840	BB40020D	2845
3A	4	-	-	BB40030C	2840	BB40030D	2845
4A	4	-	-	BB40040C	2840	BB40040D	2845
6A	4	BB40060B	2355	BB40060C	2355	BB40060D	2460
10A	4	BB40100B	2355	BB40100C	2355	BB40100D	2460
16A	4	BB40160B	2355	BB40160C	2355	BB40160D	2460
20A	4	BB40200B	2355	BB40200C	2355	BB40200D	2460
25A	4	BB40250B	2355	BB40250C	2355	BB40250D	2460
32A	4	BB40320B	2355	BB40320C	2355	BB40320D	2460
40A	4	BB40400B	3305	BB40400C	3305	BB40400D	3640
50A	4	BB40500B	3305	BB40500C	3305	BB40500D*	3640
63A	4	BB40630B	3305	BB40630C	3305	BB40630D*	3640

Note: Standard Pack Quantity for MCB : SP - 12 Nos., DP - 6 Nos., TP - 4 Nos., FP - 3 Nos.

*For details, please contact nearest branch office

MCBs (Miniature Circuit Breakers) : 80A-125A [8536]

Range Highlights

- › Short circuit Breaking Capacity - 15kA (IS/IEC 60947-2, EN 60947-2)
- › C & D Characteristics
- › Available in SP, DP, TP and FP
- › Suitable for Isolation
- › Protection Degree - IP 20
- › Availability of wide Range of Site Mountable Accessories



Rating	Modules 1 Mod = 17.5 mm	C Curve Cat. No.	M.R.P. (₹) Per Unit	D Curve Cat. No.	M.R.P. (₹) Per Unit
Single Pole (SP)					
80A	1.5	AU15S10803C	3175	AU15S10803D	3615
100A	1.5	AU15S11003C	3560	AU15S11003D	4045
125A	1.5	AU15S11253C	3830	AU15S11253D	4370
Double Pole (DP)					
80A	3	AU15S20803C	7035	AU15S20803D	8010
100A	3	AU15S21003C	7505	AU15S21003D	8535
125A	3	AU15S21253C	8260	AU15S21253D	9390
Three Pole (TP)					
80A	4.5	AU15S30803C	11100	AU15S30803D	12640
100A	4.5	AU15S31003C	11840	AU15S31003D	13455
125A	4.5	AU15S31253C	13140	AU15S31253D	14930
Four Pole (FP)					
80A	6	AU15S40803C	14500	AU15S40803D	16465
100A	6	AU15S41003C	15080	AU15S41003D	17160
125A	6	AU15S41253C	17080	AU15S41253D	19415


**CERTIFIED TO LEAD,
TRUSTED FOR SAFETY.**

BIS-Certified HR MCBs Range - 80A, 100A & 125A



Solar Combo MCBs [8536]

(AC MCB + DC MCB)

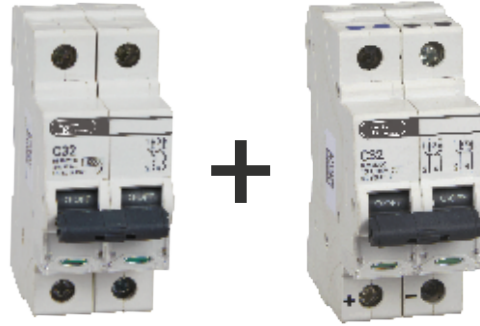

AC MCB[^] with C-Curve

Description	Modules 1 Mod = 17.5mm	Cat. No.	M.R.P. (₹) Per Unit
1 AC 16A DP MCB [^] + 1 DC 16A DP 500V MCB	2+2	SC221616	1900
New 1 AC 20A DP MCB [^] + 1 DC 20A DP 500V MCB	2+2	SC222020	1900
New 1 AC 20A DP MCB [^] + 1 DC 25A DP 500V MCB	2+2	SC222025	1900
New 1 AC 20A DP MCB [^] + 1 DC 32A DP 500V MCB	2+2	SC222032	1900
1 AC 25A DP MCB [^] + 1 DC 16A DP 500V MCB	2+2	SC222516	1900
New 1 AC 25A DP MCB [^] + 1 DC 25A DP 500V MCB	2+2	SC222525	1900
1 AC 32A DP MCB [^] + 1 DC 16A DP 500V MCB	2+2	SC223216	1900
New 1 AC 32A DP MCB [^] + 1 DC 25A DP 500V MCB	2+2	SC223225	1900
1 AC 32A DP MCB [^] + 1 DC 32A DP 500V MCB	2+2	SC223232	1900

Double the Protection, Twice the Power!

Complete Protection for Solar Rooftop Installations

DC MCB :

10kA as per IEC 60947-2

AC MCB

10kA as per IS/IEC 60898-1



Miniature Circuit Breaker (MCB) [8536]

DC MCBs as per IEC 60947-2 [8536]

Rated Voltage:
Breaking capacity of 6 kA - BB Series DC MCBs

130V DC SP MCB



Rating	Modules 1 Mod = 17.5mm	Cat. No.	M.R.P. (₹) Per Unit
Single Pole (SP)			
0.5A	1	BB10E5DC	755
1A	1	BB1001DC	755
2A	1	BB1002DC	755
3A	1	BB1003DC	755
4A	1	BB1004DC	755
6A	1	BB1006DC	655
10A	1	BB1010DC	655
16A	1	BB1016DC	655
20A	1	BB1020DC	655
25A	1	BB1025DC	655
32A	1	BB1032DC	655
40A	1	BB1040DC	860
50A	1	BB1050DC	860
63A	1	BB1063DC	860

Rated Voltage:
Breaking capacity of BJ Series DC MCBs
» 10kA till 40 A
» 6kA for 50A, 63A

250V DC SP MCB

Rating	Modules 1 Mod = 17.5mm	Cat. No.	M.R.P. (₹) Per Unit
Single Pole (SP)			
0.5A	1	BJ10E5DC	895
1A	1	BJ1001DC	895
2A	1	BJ1002DC	895
3A	1	BJ1003DC	895
4A	1	BJ1004DC	895
6A	1	BJ1006DC	730
10A	1	BJ1010DC	730
16A	1	BJ1016DC	730
20A	1	BJ1020DC	730
25A	1	BJ1025DC	730
32A	1	BJ1032DC	730
40A	1	BJ1040DC	1010
50A	1	BJ1050DC	1010
63A	1	BJ1063DC	1010

250V DC DP MCB



0.5A	2	BB20E5DC	1615
1A	2	BB2001DC	1615
2A	2	BB2002DC	1615
3A	2	BB2003DC	1615
4A	2	BB2004DC	1615
6A	2	BB2006DC	1420
10A	2	BB2010DC	1420
16A	2	BB2016DC	1420
20A	2	BB2020DC	1420
25A	2	BB2025DC	1420
32A	2	BB2032DC	1420
40A	2	BB2040DC	1920
50A	2	BB2050DC	1920
63A	2	BB2063DC	1920

500V DC DP MCB

0.5A	2	BJ20E5DC	1865
1A	2	BJ2001DC	1865
2A	2	BJ2002DC	1865
3A	2	BJ2003DC	1865
4A	2	BJ2004DC	1865
6A	2	BJ2006DC	1575
10A	2	BJ2010DC	1575
16A	2	BJ2016DC	1575
20A	2	BJ2020DC	1575
25A	2	BJ2025DC	1575
32A	2	BJ2032DC	1575
40A	2	BJ2040DC	2005
50A	2	BJ2050DC	2005
63A	2	BJ2063DC	2005

Note: Standard Pack Quantity for MCB : SP - 12 Nos., DP - 6 Nos.

1000V DC MCBs [8536]

Rated Voltage: 1000V DC
with breaking capacity of 6 kA - BK Series DC MCBs

New



Description	Modules 1 Mod = 17.5mm	Cat. No.	M.R.P. (₹) Per Unit
DP 6A 1000V DC 6kA MCB	4	BK2006DC	2400
DP 10A 1000V DC 6kA MCB	4	BK2010DC	2400
DP 16A 1000V DC 6kA MCB	4	BK2016DC	2400
DP 20A 1000V DC 6kA MCB	4	BK2020DC	2400
DP 25A 1000V DC 6kA MCB	4	BK2025DC	2400
DP 32A 1000V DC 6kA MCB	4	BK2032DC	2400
DP 40A 1000V DC 6kA MCB	4	BK2040DC	2915
DP 50A 1000V DC 6kA MCB	4	BK2050DC	2915
DP 63A 1000V DC 6kA MCB	4	BK2063DC	2915

Isolators [8536]



Range Highlights

- › Conforms to IEC 60947-3
- › Utilization category AC-22A
- › Available in DP, TP and FP versions in 40A, 63A, 80A & 100A ratings

Rating	Modules 1 Mod = 17.5 mm	Cat. No.	M.R.P. (₹) Per Unit	Modules 1 Mod = 17.5 mm	Cat. No.	M.R.P. (₹) Per Unit	Modules 1 Mod = 17.5 mm	Cat. No.	M.R.P. (₹) Per Unit
Double Pole (DP)			Three Pole (TP)			Four Pole (FP)			
40A	2	BF204000	685	3	BF304000	1190	4	BF404000	1525
63A	2	BF206300	870	3	BF306300	1370	4	BF406300	1595
80A	2	BF208000	1110	3	BF308000	1505	4	BF408000	1785
100A	2	BF210000	1165	3	BF310000	1605	4	BF410000	1930

Note: Standard Pack Quantity for Isolator : DP - 6 Nos., TP - 4 Nos., FP - 3 Nos.

RCCB (Residual Current Circuit Breaker) [8536]



Range Highlights

- › Conforms to IS 12640 (Part 1) / IEC 61008-1
- › RCCBs are available in DP and FP versions from 25 to 100A ratings with 30 mA, 100 mA and 300mA sensitivity



- › Truly current operated - operation even at nominal Voltage
- › Operates on Core Balance Current Transformer (CBCT) principle
- › Advanced neutral mechanism

Rating	Sensitivity	Modules 1 Mod = 17.5 mm	Cat. No.	M.R.P. (₹) Per Unit
Double Pole (DP)				
25A	30 mA	2	BG202503	3685
	100 mA	2	BG202510	3910
	300 mA	2	BG202530	3910
32A	30 mA	2	BG203203	4135
	100 mA	2	BG203210	4470
	300 mA	2	BG203230	4470
40A	30 mA	2	BG204003	4135
	100 mA	2	BG204010	4470
	300 mA	2	BG204030	4470
63A	30 mA	2	BG206303	5160
	100 mA	2	BG206310	5390
	300 mA	2	BG206330	5390
100A	30 mA	2	BG210003	9270
	100 mA	2	BG210010	9385
	300 mA	2	BG210030	9385

Rating	Sensitivity	Modules 1 Mod = 17.5 mm	Cat. No.	M.R.P. (₹) Per Unit
Four Pole (FP)				
25A	30 mA	4	BG402503	4825
	100 mA	4	BG402510	5050
	300 mA	4	BG402530	5050
32A	30 mA	4	BG403203	4870
	100 mA	4	BG403210	5135
	300 mA	4	BG403230	5135
40A	30 mA	4	BG404003	4870
	100 mA	4	BG404010	5135
	300 mA	4	BG404030	5135
63A	30 mA	4	BG406303	5510
	100 mA	4	BG406310	5890
	300 mA	4	BG406330	5890
100A	30 mA	4	BG410003	9600
	100 mA	4	BG410010	9955
	300 mA	4	BG410030	9955

RCCBs (Residual Current Circuit Breakers) : Type-Adi (with Added immunity) [8536]



Range Highlights

- › Wide Range of Current Ratings - 25A to 100A
- › Precise Sensitivities for variety of applications - from 30mA to 300mA
- › 2P & 4P versions
- › Suitable for Isolation
- › Protection Degree - IP 20
- › Availability of wide Range of Site Mountable Accessories
- › Type Adi: Suitable for AC + Pulsating DC (Type A) + Harmonics

Rating	Sensitivity	Modules 1 Mod = 17.5 mm	CAT Nos.	M.R.P. (₹) Per Unit
2P Adi				
25A	30mA	2	AURAD202503	6395
	100mA	2	AURAD202510	6690
	300mA	2	AURAD202530	6690
40A	30mA	2	AURAD204003	6785
	100mA	2	AURAD204010	6895
	300mA	2	AURAD204030	6895
63A	30mA	2	AURAD206303	7940
	100mA	2	AURAD206310	8090
	300mA	2	AURAD206330	8090
100A	30mA	2	AURAD210003	11730

Rating	Sensitivity	Modules 1 Mod = 17.5 mm	CAT Nos.	M.R.P. (₹) Per Unit
4P Adi				
25A	30mA	4	AURAD402503	7735
	100mA	4	AURAD402510	7880
	300mA	4	AURAD402530	7880
40A	30mA	4	AURAD404003	8030
	100mA	4	AURAD404010	8155
	300mA	4	AURAD404030	8155
63A	30mA	4	AURAD406303	8745
	100mA	4	AURAD406310	8925
	300mA	4	AURAD406330	8925
100A	30mA	4	AURAD410003	13930
	300mA	4	AURAD410030	13930

All-Rounder RCDs (RCCB & RCBO)

Specially designed Adi RCDs ensure Safe and Reliable protection for All Applications in AC networks with Pulsating DC along with Harmonics



Added Immunity

RCBOs (Residual Current Breaker with Overcurrent Protection) [8536]

Range Highlights*

- › Conforms to IEC 61009-1, IS 12640-2, EN 61009-1
- › Short circuit Breaking Capacity - 10kA
- › Precise Sensitivities for a variety of applications
 - › from 10mA to 300mA
- › Suitable for Isolation

Type-AC

Rating	Sensitivity	Modules 1 Mod = 17.5 mm	CAT Nos.	M.R.P. (₹) Per Unit
2P AC*				
6A	10mA	2	AUF3C200601	5835
	30mA	2	AUF3C200603	5835
	100mA	2	AUF3C200610	5955
	300mA	2	AUF3C200630	6025
10A	10mA	2	AUF3C201001	5835
	30mA	2	AUF3C201003	5835
	100mA	2	AUF3C201010	5955
	300mA	2	AUF3C201030	6025
16A	10mA	2	AUF3C201601	5835
	30mA	2	AUF3C201603	5835
	100mA	2	AUF3C201610	5955
	300mA	2	AUF3C201630	6025
20A	30mA	2	AUF3C202003	5835
	100mA	2	AUF3C202010	5955
	300mA	2	AUF3C202030	6025
25A	30mA	2	AUF3C202503	5835
	100mA	2	AUF3C202510	5955
	300mA	2	AUF3C202530	6025
32A	30mA	2	AUF3C203203	5835
	100mA	2	AUF3C203210	5955
	300mA	2	AUF3C203230	6025
40A	30mA	2	AUF3C204003	5835
	100mA	2	AUF3C204010	5955
	300mA	2	AUF3C204030	6025
63A	30mA	4	AUF3C206303	6930
	100mA	4	AUF3C206310	7350
	300mA	4	AUF3C206330	7410
4P AC				
16A	30mA	7.5	AUF3C401603	6265
	100mA	7.5	AUF3C401610	6975
	300mA	7.5	AUF3C401630	7115
20A	30mA	7.5	AUF3C402003	6265
	100mA	7.5	AUF3C402010	6975
	300mA	7.5	AUF3C402030	7115
25A	30mA	7.5	AUF3C402503	6265
	100mA	7.5	AUF3C402510	6975
	300mA	7.5	AUF3C402530	7115
32A	30mA	7.5	AUF3C403203	6470
	100mA	7.5	AUF3C403210	6980
	300mA	7.5	AUF3C403230	7135
40A	30mA	7.5	AUF3C404003	6570
	100mA	7.5	AUF3C404010	6980
	300mA	7.5	AUF3C404030	7155
63A	30mA	7.5	AUF3C406303	7875
	100mA	7.5	AUF3C406310	8020
	300mA	7.5	AUF3C406330	8020
80A	30mA	12	AUF3C408003	30515
	100mA	12	AUF3C408010	31195
	300mA	12	AUF3C408030	31195
100A	30mA	12	AUF3C410003	32620
	100mA	12	AUF3C410010	33400
	300mA	12	AUF3C410030	33400



- › Availability of wide Range of Site Mountable Accessories
- › Available in
 - › Type AC: For standard AC installations
 - › Type Adi: Suitable for AC + Pulsating DC (Type A) + Harmonics

Type-Adi

Rating	Sensitivity	Modules 1 Mod = 17.5 mm	CAT Nos.	M.R.P. (₹) Per Unit
2P Adi				
6A	30mA	2	AUF3D200603	7875
	100mA	2	AUF3D200610	8675
	300mA	2	AUF3D200630	9000
	30mA	2	AUF3D201003	7875
10A	100mA	2	AUF3D201010	8675
	300mA	2	AUF3D201030	9000
	30mA	2	AUF3D201603	7875
16A	100mA	2	AUF3D201610	8675
	300mA	2	AUF3D201630	9000
	30mA	2	AUF3D202003	7875
20A	100mA	2	AUF3D202010	8675
	300mA	2	AUF3D202030	9000
	30mA	2	AUF3D202503	7875
25A	100mA	2	AUF3D202510	8675
	300mA	2	AUF3D202530	9000
	30mA	2	AUF3D203203	7875
32A	100mA	2	AUF3D203210	8675
	300mA	2	AUF3D203230	9000
	30mA	2	AUF3D204003	7875
40A	100mA	2	AUF3D204010	8675
	300mA	2	AUF3D204030	9000
	30mA	4	AUF3D206303	9110
63A	100mA	4	AUF3D206310	9635
	300mA	4	AUF3D206330	9720
	4P Adi			
16A	30mA	7.5	AUF3D401603	8230
	100mA	7.5	AUF3D401610	9150
	300mA	7.5	AUF3D401630	9340
20A	30mA	7.5	AUF3D402003	8230
	100mA	7.5	AUF3D402010	9150
	300mA	7.5	AUF3D402030	9340
25A	30mA	7.5	AUF3D402503	8230
	100mA	7.5	AUF3D402510	9150
	300mA	7.5	AUF3D402530	9340
32A	30mA	7.5	AUF3D403203	8490
	100mA	7.5	AUF3D403210	9160
	300mA	7.5	AUF3D403230	9350
40A	30mA	7.5	AUF3D404003	8620
	100mA	7.5	AUF3D404010	9160
	300mA	7.5	AUF3D404030	9390
63A	30mA	7.5	AUF3D406303	10330
	100mA	7.5	AUF3D406310	10540
	300mA	7.5	AUF3D406330	10540
80A	30mA	12	AUF3D408003	30515
	100mA	12	AUF3D408010	31195
	300mA	12	AUF3D408030	31195
100A	30mA	12	AUF3D410003	32620
	100mA	12	AUF3D410010	33400
	300mA	12	AUF3D410030	33400

*For technical details, please contact nearest branch office

#For 2P AC/Adi D Curve RCBO, please contact nearest branch office

SPDs (Surge Protection Devices) [8536]



Range Highlights

- › Conforms to IEC 61643-11
- › Available in Type 2 and Type 1+2
- › Type 2 : Protection against indirect lightning and switching surges
 - » Maximum Discharge Current - I_{max} up to 70kA
- › Type 1+2 : Protection against direct and indirect lightning surges
 - » Maximum Discharge Current - I_{max} up to 100kA



800V Solar Application

Description	Configuration	Modules 1 Mod = 17.5 mm	Voltage (Uc)	Cat. No.	M.R.P. (₹) Per Unit
Type 2, I _{max} 40kA	3P	4	1500	AUSP023P40-1500	15000
Type 1+2, I _{imp} 12.5kA	3P	5	1360	AUSP123P50-1360	45000
Type 1+2, I _{imp} 12.5kA	3P	4	880	AUSP123P50-880	30000

440V Application (Common + Differential Mode)

Description	I _{max}	Configuration	Modules 1 Mod = 17.5 mm	Cat. No.	M.R.P. (₹) Per Unit
Type 1+2, I _{imp} 12.5kA	50kA	1P+N	2	AUSP121PN50D	11955
		3P+N	4	AUSP123PN50D	22900
Type 2	40kA	1P+N	1	AUSP021PN40D	7475
		3P+N	2	AUSP023PN40D	14935
Type 2	15kA	1P+N	1	AUSP021PN15D	5980
		3P+N	2	AUSP023PN15D	11760
Type 1+2, I _{imp} 8kA	100kA	1P+N	2	AUSP121PN100D	10750
		3P+N	4	AUSP123PN100D	21120
Type 2	70kA	1P+N	2	AUSP021PN70D	11740
		3P+N	4	AUSP023PN70D	19550

SPD Cartridges

Description	Cat. No.	M.R.P. (₹) Per Unit
Cartridge for AUSP021PN15D	AUSC021PN15D	2940
Cartridge for AUSP021PN40D	AUSC021PN40D	3660
Cartridge for AUSP021PN70D / AUSP023PN70D	AUSC021PN70D	3915
Cartridge for AUSP023PN15D [#]	AUSC023PN15D	3845
Cartridge for AUSP023PN40D [#]	AUSC023PN40D	4885
Cartridge for AUSP121PN100D / AUSP123PN100D	AUSC121PN100D	5865
Cartridge for AUSP121PN50D / AUSP123PN50D	AUSC121PN50D	6330
Cartridge for AUSP023PN15D [#]	AUSC023PN15DG	4455
Cartridge for AUSP023PN40D [#]	AUSC023PN40DG	4650

[#]For technical details, please contact nearest branch office

ACCL (Automatic Changeover with Current Limiter) [8536]

Single Phase ACCL



Range Highlights

- › Conforms to IEC 60947-6, IEC 60947-3
- › Wide Range of Current Ratings
 - » (Generator side) - 1A to 30A
 - » (Electricity Board side) - 30A
- › RoHS compliant

Description EB/DG	Modules 1 Mod = 17.5 mm	CAT Nos.	M.R.P. (₹) Per Unit
30A/1A	4	AUCL01030001	2930
30A/1.5A	4	AUCL010301E5	2930
30A/2A	4	AUCL01030002	2930
30A/2.5A	4	AUCL010302E5	2930
30A/3A	4	AUCL01030003	2930
30A/4A	4	AUCL01030004	2930
30A/5A	4	AUCL01030005	2930
30A/6A	4	AUCL01030006	2930
30A/8A	4	AUCL01030008	2930
30A/10A	4	AUCL01030010	2930
30A/12A	4	AUCL01030012	2930
30A/15A	4	AUCL01030015	2930
30A/20A	4	AUCL01030020	2930
30A/30A	4	AUCL01030030*	2930

*Non-current limiting variant

Three Phase ACCL



Range Highlights

- › Settable overload current limit at DG side
- › Separate power consumption monitoring for Mains & Genset
- › Settable overvoltage & undervoltage protection
- › Settable TPN or SPN mode at DG side
- › Protection against single phasing

Description (AC-1) EB/DG	Cat. No.	M.R.P. (₹) Per Unit
32A / 32A	AUCL03032032	14385
40A / 32A	AUCL03040032	14825
40A / 40A	AUCL03040040	16045
50A / 50A	AUCL03050050	22870
63A / 50A	AUCL03063050	25235
63A / 63A	AUCL03063063	28585
80A / 80A	AUCL03080080	43565
125A / 125A	AUCL03125125	73335

For 3 Phase ACCL programming video
please scan the QR code or click here



Changeover Switches [8536]



Range Highlights

- › Conforms to IEC 60947-3 and IS/IEC 60947-3
- › Available in 3 positions (I-O-II) with centre off position
- › Utilization category AC-22A

Rating	Modules 1 Mod = 17.5 mm	Cat. No.	M.R.P. (₹) Per Unit
Double Pole			
25A	2	AUC00202500	1975
40A	2	AUC00204000	3020
63A	3	AUC00206300	3515
Four Pole			
40A	4	AUC00404000	5205
63A	6	AUC00406300	5900

Accessories

Accessories [8538]



All Half Module and One Module Accessories are common for AU MCBs, RCCBs and RCBOs

Description	Configuration	Modules 1 Mod = 17.5 mm	Voltage	CAT Nos.	M.R.P. (₹) Per Unit
Auxiliary Contact	1NO+1NC	0.5	240V AC, 24V DC	AUAXAC240	1110
AUX/TAC*	1NO+1NC	0.5	240V AC, 24V DC	AUATAC240	1300
HR AUX/TAC*	1NO+1NC	0.5	240V AC, 24V DC	AUATAC240HR	1300
Undervoltage Release	-	1	240V AC	AUUVC240	2625
Release	-	1	24V DC	AUUVC024	2625
Overvoltage Release	-	1	240V AC	AUOVAC240	3245
Shunt Release	-	1	240V AC	AUSRAC240	3010
	-	1	24V DC	AUSRDC024	3010
Padlock-Suitable for Lock Hasp 3.5 - 5 mm dia. max	Suitable for 1Pole=1Mod devices: RCCBs, RCBOs, Changeover Switches up to 40A			AUPD01	595
	Suitable for 1Pole-1.5Mod devices: MCBs 80A-125A, Changeover Switch 63A			AUPD02	670

Note: Standard Pack Quantity for Padlock - 2 Nos.

*For 80A-125A MCBs please contact nearest branch office

Control & Monitoring Devices

Modular Contactors [8536]



Range Highlights

- › Wide Range of Current Ratings:
 - › 25A, 40A and 63A
- › Conforms to :
 - › IEC 61095, EN 61095
 - › IEC 60947-4-1, EN 60947-4-1
 - › IEC 60947-5-1
- › Protection Degree IP 20

Description (AC-1)	Modules 1 Mod = 17.5 mm	Cat. No.	M.R.P. (₹) Per Unit
25A-1NO	1	AUMC1002501	2215
25A-2NO	1	AUMC2002501	2780
40A-2NO	3	AUMC2004003	4750
40A-3NO	3	AUMC3004003	6810
40A-4NO	3	AUMC4004003	7985
63A-2NO+2NC	3	AUMC2206303	8445
63A-3NO	3	AUMC3006303	8650
63A-4NO	3	AUMC4006303	9525
Accessory [8538]			
Auxiliary Contact, 2NO	0.5	AUMCAUX240	2070

Energy Meters [9030]



Range Highlights

- › DIN mounting whole current operated meter
- › Accuracy Class 1.0
- › Inbuilt RS485 option
- › **Parameters :** Voltage, Current, kW, kWh, kVA, kVAh, RPM, Load hours, Interruptions

Description	Modules 1 Mod = 17.5 mm	Cat. No.	M.R.P. (₹) Per Unit
Single Phase - 60A	2	WD4010100000	3410
Three Phase - 80A	5	WD4020100000	7385
Single Phase - 60A (RS485)	2	WD4010110000	5045
Three Phase - 80A (RS485)	5	WD4020110000	11145

Indicating Lights [8531]



Description	Modules 1 Mod = 17.5 mm	Cat. No.	M.R.P. (₹) Per Unit
RED	1	AUIL01RED00	1275
YELLOW	1	AUIL01YEL00	1275
BLUE	1	AUIL01BLU00	1275
GREEN	1	AUIL01GRE00	1275
RED-YELLOW-BLUE	1	AUIL01RYB00	1550

Auxiliary & Accessories for Exora MCBs [8538]



Description	Cat. No.	M.R.P. (₹) Per Unit
Auxiliary Contact - 6A, 240V AC, (1NO+1NC), 0.5 Mod	BZA11006	1065
Shunt Release - 240V AC, 1 Mod	BZS00240	2915
Trip Alarm Contact - 6A, 240V AC, (1NO+1NC), 0.5 Mod	BZT11006	1245

Plugs



Highlights

- › Conforms to IEC 60309 -1&2
- › Mechanical Impact - IK08
- › Ingress Protection - IP44 & IP67
- › Fire Resistance - 850°C as per IEC 60695-2-11
- › Easy Screw connection with same orientation of clamp screws

Description	Cat NO	M.R.P. (₹) Per Unit
Plug - IP44		
16A, 2P+E	PSKPM30164	610
32A, 2P+E	PSKPM30324	960
16A, 3P+E	PSKPM40164	780
32A, 3P+E	PSKPM40324	1135
16A, 3P+N+E	PSKPM50164	820
32A, 3P+N+E	PSKPM50324	1095
Plug - IP67		
16A, 2P + E	PSKPM30167	1355
32A, 2P + E	PSKPM30327	1915
63A, 2P + E	PSKPM30637	5435
16A, 3P + E	PSKPM40167	1530
32A, 3P + E	PSKPM40327	2420
63A, 3P + E	PSKPM40637	5175
16A, 3P + N + F	PSKPM50167	1640
32A, 3P + N + E	PSKPM50327	2085
63A, 3P + N + E	PSKPM50637	5185
125A, 3P + N + E	PSKPM51257	15840

Socket



Highlights

- › Conforms to IEC 60309 -1&2
- › Mechanical Impact - IK08
- › Ingress Protection - IP44 & IP67
- › Fire Resistance - 850°C as per IEC 60695-2-11
- › Easy Screw connection with same orientation of clamp screws

Description	Cat NO	M.R.P. (₹) Per Unit
Socket - IP44		
16A, 2P+E	PSKSM30164	845
32A, 2P+E	PSKSM30324	1180
16A, 3P+E	PSKSM40164	990
16A, 3P + N + E	PSKSM50164	1080
32A, 3P + N + E	PSKSM50324	1445
Socket - IP67		
16A, 2P+E	PSKSM30167	1590
32A, 2P+E	PSKSM30327	2185
63A, 2P+E	PSKSM30637	5915
16A, 3P+E	PSKSM40167	1995
63A, 3P+E	PSKSM40637	5970
16A, 3P + N + E	PSKSM50167	2085
32A, 3P + N + E	PSKSM50327	2440
63A, 3P + N + E	PSKSM50637	6065
125A, 3P + N + E	PSKSM51257	19040

Socket Angled



Highlights

- › Conforms to IEC 60309 -1&2
- › Mechanical Impact - IK08
- › Ingress Protection - IP44 & IP67
- › Fire Resistance - 850°C as per IEC 60695-2-11
- › Easy Screw connection with same orientation of clamp screws

Description	Cat NO	M.R.P. (₹) Per Unit
Socket Angled - IP44		
16A, 2P+E	PSKSA30164	655
32A, 2P+E	PSKSA30324	1160
16A, 3P+E	PSKSA40164	990
32A, 3P+E	PSKSA40324	1370
16A, 3P+N+E	PSKSA50164	1055
32A, 3P+N+E	PSKSA50324	1340
Socket Angled - IP67		
16A, 2P+E	PSKSA30167	1250
32A, 2P+E	PSKSA30327	1630
63A, 2P+E	PSKSA30637	5340
32A, 3P+E	PSKSA40327	2420
63A, 3P+E	PSKSA40637	5350
32A, 3P+N+E	PSKSA50327	1930
63A, 3P+N+E	PSKSA50637	5455
125A, 3P+N+E	PSKSA51257	18105

Socket Straight



Highlights

- › Conforms to IEC 60309 -1&2
- › Mechanical Impact - IK08
- › Ingress Protection - IP44 & IP67
- › Fire Resistance - 850°C as per IEC 60695-2-11
- › Easy Screw connection with same orientation of clamp screws

Description	Cat NO	M.R.P. (₹) Per Unit
Socket Straight- IP44		
16A, 2P+E	PSKSS30164	750
32A, 2P+E	PSKSS30324	1190
32A, 3P+N+E	PSKSS50324	1490
Socket Straight- IP67		
16A, 2P+E	PSKSS30167	1260
63A, 2P+E	PSKSS30637	6465
63A, 3P+E	PSKSS40637	5400
63A, 3P+N+E	PSKSS50637	5400
125A, 3P+N+E	PSKSS51257	18105

Distribution Board suitable for Aluminum shuttering (Mivan) Construction



DBs suitable for Aluminum Shuttering Construction [8537]

SPN DBs

Highlights

- Available in CRCA sheet steel, RAL9003, powder coated
- Ready to use DBs - Provided with 100A insulated phase bus-bar | neutral bar/s with shroud/s | earth bar/s | sticking saddles | cement spill protector | color-coded interconnecting wire set | cable ties | blanking plates and circuit identification label
- With provision for DP MCB/Isolator/RCCB/RCBO as incomer and SP MCBs as outgoing

Description	No. of Modules		Cat. Nos.	M.R.P. (₹) Per Unit
	Incomer + Outgoing			
IP 43 - Metal Door				
4 way	2	2	LTSD04M	*
6 way	2	4	LTSD06M	*
8 way	2	6	LTSD08M	*
12 way	2	10	LTSD12M	*
16 way	2	14	LTSD16M	*

TPN DBs

Highlights

- Available in CRCA sheet steel, RAL 9003, powder coated
- Ready to use DBs - Provided with 100A insulated phase bus-bars | neutral bar/s with shroud/s | earth bar/s | sticking saddles | cement spill protector | color-coded interconnecting wire set | cable ties | blanking plates and circuit identification labels
- With provision for FP MCB/Isolator/RCCB/RCBO as incomer and SP MCBs as outgoing

Description	No. of Modules		Cat. Nos.	M.R.P. (₹) Per Unit
	Incomer + Outgoing			
IP 43 - Metal Door				
4 way	8	4+4+4	LTTD04M	*
6 way	8	6+6+6	LTTD06M	*
8 way	8	8+8+8	LTTD08M	*

*For details, please contact nearest branch office

EXORA.N
Distribution Boards

**Lauritz
Knudsen**
Electrical & Automation

DESIGN OR SAFETY?
OBVIOUSLY BOTH. OBVIOUSLY EXORA.N DB.

#ExoraHaiTohSafeHai



©2026. ALL RIGHTS RESERVED

Highlights

- › Conforms to IEC 61439-1 & 3
- › IK 08-for single door DBs, IK 09-for double door DBs
- › Available in CRCA sheet steel, RAL9003, powder coated
- › Ready to use DBs - Provided with 100A insulated phase bus-bar | neutral bar/s with shroud/s | earth bar/s | sticking saddles | cement spill protector | color-coded interconnecting wire set | cable ties | blanking plates and circuit identification label
- › With provision for DP MCB/Isolator/RCCB/RCBO as incomer and SP MCBs as outgoing



Description	No. of Modules		Cat. Nos.	M.R.P. (₹) Per Unit
	Incomer	Outgoing		
IP 30 - Single Door				
4 way	2	2	DESPN004SDS	1790
6 way	2	4	DESPN006SDS	1875
8 way	2	6	DESPN008SDS	2160
12 way	2	10	DESPN012SDS	2565
16 way	2	14	DESPN016SDS	3140
18 way	2	16	DESPN018SDS	3650
IP 43 - Metal Door				
4 way	2	2	DESPN004DDS	2330
6 way	2	4	DESPN006DDS	2685
8 way	2	6	DESPN008DDS	2875
12 way	2	10	DESPN012DDS	3450
16 way	2	14	DESPN016DDS	4360
18 way	2	16	DESPN018DDS	4565
IP 43 - Glazed Door				
4 way	2	2	DESPN004GDS	3120
6 way	2	4	DESPN006GDS	3320
8 way	2	6	DESPN008GDS	3610
12 way	2	10	DESPN012GDS	4395
16 way	2	14	DESPN016GDS	5460
18 way	2	16	DESPN018GDS	5780
IP 54 - Metal Door				
4 way	2	2	DESPN00454S	8135
6 way	2	4	DESPN00654S	9070
8 way	2	6	DESPN00854S	9645
12 way	2	10	DESPN01254S	11075
16 way	2	14	DESPN01654S	12330
18 way	2	16	DESPN01854S	12605

Highlights

- › Conforms to IEC 61439-1 & 3
- › IK 08-for single door DBs, IK 09-for double door DBs
- › Available in CRCA sheet steel, RAL 9003, powder coated
- › Ready to use DBs - Provided with 100A insulated phase bus-bars | neutral bar/s with shroud/s | earth bar/s | sticking saddles | cement spill protector | color-coded interconnecting wire set | cable ties | blanking plates and circuit identification labels
- › With provision for FP MCB/Isolator/RCCB/RCBO as incomer and SPMCBs as outgoing



Description	No. of Modules		Cat. Nos.	M.R.P. (₹) Per Unit
	Incomer	Outgoing		
IP 30 - Single Door				
4 way	4	4+4+4	DETPN004SDS	4660
6 way	4	6+6+6	DETPN006SDS	5720
4 way	8	4+4+4	DETPN004SDS	4910
6 way	8	6+6+6	DETPN006SDS	6080
8 way	8	8+8+8	DETPN008SDS	7170
12 way	8	12+12+12	DETPN012SDS	10330
16 way	8	16+16+16	DETPN016SDS	12595
IP 43 - Metal Door				
4 way	4	4+4+4	DETPN004DDS	5480
6 way	4	6+6+6	DETPN006DDS	6810
4 way	8	4+4+4	DETPN004DDS	5730
6 way	8	6+6+6	DETPN006DDS	7140
8 way	8	8+8+8	DETPN008DDS	8570
12 way	8	12+12+12	DETPN012DDS	12780
16 way	8	16+16+16	DETPN016DDS	15860
IP 43 - Glazed Door				
4 way	4	4+4+4	DETPN004GDS	7440
6 way	4	6+6+6	DETPN006GDS	8945
4 way	8	4+4+4	DETPN004GDS	7745
6 way	8	6+6+6	DETPN006GDS	9425
8 way	8	8+8+8	DETPN008GDS	11175
12 way	8	12+12+12	DETPN012GDS	17145
16 way	8	16+16+16	DETPN016GDS	20605
IP 54 - Metal Door				
4 way	4	4+4+4	DETPN00454S	18585
6 way	4	6+6+6	DETPN00654S	21720
4 way	8	4+4+4	DETPN00454S	19645
6 way	8	6+6+6	DETPN00654S	23655
8 way	8	8+8+8	DETPN00854S	25860
12 way	8	12+12+12	DETPN01254S	36450
16 way	8	16+16+16	DETPN01654S	43745

For ordering old DBs, replace Cat no with "DB" instead of "DE".
Eg. - New DB Cat no for SPN 12W DD - DESPN012DDS, Old DB Cat no for same will be DBSPN012DDS. Old DBs are available till stock last.

Highlights

- › Conforms to IEC 61439-1 & 3
- › IK 09-for double door DBs
- › Available in CRCA sheet steel, RAL 9003, powder coated
- › Ready to use DBs - Provided with 100A insulated phase bus-bars | neutral bar/s with shroud/s | earth bar/s | sticking saddles | cement spill protector | color-coded interconnecting wire set | cable ties | blanking plates and circuit identification labels
- › With provision for FP MCB / Isolator / RCCB / RCBO as incomer, DP RCCB/RCBO as sub-incomer and SP MCBs as outgoing



Horizontal PPI DBs

IP 43 - Metal Door

Description	No. of Modules			Cat. Nos.	M.R.P. (₹) Per Unit
	Incomer	Sub-Incomer	Outgoing		
IP 43 - Metal Door					
4 way	8	2+2+2	4+4+4	DEHPI004DD	10190
6 way	8	2+2+2	6+6+6	DEHPI006DD	12065
8 way	8	2+2+2	8+8+8	DEHPI008DD	14470
12 way	8	2+2+2	12+12+12	DEHPI012DD	19940
16 way	8	2+2+2	16+16+16	DEHPI016DD	23920



Tier PPI DBs

Description	No. of Modules			Cat. Nos.	M.R.P. (₹) Per Unit
	Incomer	Sub-Incomer	Outgoing		
IP 43 - Metal Door					
6 way	8	2+2+2	6+6+6	DETP1006DD	12485
8 way	8	2+2+2	8+8+8	DETP1008DD	15655
10 way	8	2+2+2	10+10+10	DETP1010DD	16410
12 way	8	2+2+2	12+12+12	DETP1012DD	17385
16 way	8	2+2+2	16+16+16	DETP1016DD	19820
12 way	MCCB*	2+2+2	12+12+12	DETP1012DD	18595

*Suitable for 3 Pole & 4 Pole DU100H, DU100D, DN0-100D & DN0-100C MCCB as incomer

Highlights

- › Conforms to IEC 61439-1 & 3
- › IK 09-for double door DBs
- › Available in CRCA sheet steel, RAL 9003, powder coated
- › Ready to use DBs - Provided with 100A insulated phase bus-bars | neutral bar/s with shroud/s | earth bar/s | sticking saddles | cement spill protector | color-coded interconnecting wire set | cable ties | blanking plates and circuit identification labels
- › With provision for
 - » Modular Incomer - FP MCB/Isolator/RCCB/RCBO as incomer, DP RCCB/RCBO as sub-incomer and SP MCBs as outgoing
 - » MCCB Incomer - MCCB* as incomer, DP RCCB/RCBO as sub-incomer and SP MCBs as outgoing



With Modular Incomer

Description	No. of Modules			Cat. Nos.	M.R.P. (₹) Per Unit
	Incomer	Sub-Incomer	Outgoing		
IP 43 - Metal Door					
4 way	8	4+4+4	4+4+4	DEPSG004DD	14965
6 way	8	4+4+4	6+6+6	DEPSG006DD	16875
8 way	8	4+4+4	8+8+8	DEPSG008DD	18825
12 way	8	4+4+4	12+12+12	DEPSG012DD	23355



With MCCB Incomer

Description	No. of Modules			Cat. Nos.	M.R.P. (₹) Per Unit
	Incomer*	Sub-Incomer	Outgoing		
IP 43 - Metal Door					
4 way	MCCB	4+4+4	4+4+4	DEPGL004DD	20585
6 way	MCCB	4+4+4	6+6+6	DEPGL006DD	23540
8 way	MCCB	4+4+4	8+8+8	DEPGL008DD	27225
12 way	MCCB	4+4+4	12+12+12	DEPGL012DD	30705

*Suitable for 3 Pole & 4 Pole DU100H, DU100D, DN0-100D & DN0-100C MCCB as incomer

For ordering old DBs, replace Cat no with "DB" instead of "DE".
Eg. - New DB Cat no for SPN 12W DD - DESPN012DDS, Old DB Cat no for same will be DBSPN012DDS. Old DBs are available till stock last.

Vertical TPN DB with MCCB Incomer [8537]



Highlights

- › Conforms to IEC 61439-1 & 3
- › IK 09-for double door DBs
- › Available in CRCA sheet steel, RAL 9003, powder coated
- › Ready to use DBs - Provided with insulated vertical phase bus-bars | neutral bar/s with shroud/s | earth bar/s | sticking saddles | cement spill protector | color-coded interconnecting wire set | cable ties | blanking plates and circuit identification labels
- › With provision for 3 pole and 4 Pole MCCB* as incomer and SP/TP MCCBs as outgoing



Up to 125A MCCB Incomer

Description	No. of Modules		Cat. Nos.	M.R.P. (₹) Per Unit
	Incomer*	Outgoing		
IP 43 - Metal Door				
4 way	MCCB	4+4+4	DEVTL004DD	16700
6 way	MCCB	6+6+6	DEVTL006DD	18980
8 way	MCCB	8+8+8	DEVTL008DD	20895
12 way	MCCB	12+12+12	DEVTL012DD	28425
16 way	MCCB	16+16+16	DEVTL016DD	33910
IP 54 - Metal Door				
4 way	MCCB	4+4+4	DEVTL00454	34590
6 way	MCCB	6+6+6	DEVTL00654	39445
8 way	MCCB	8+8+8	DEVTL00854	42700

*Suitable for 3 Pole & 4 Pole DZO MCCB as incomer. In case of any other MCCB frame requirement please contact nearest branch.

Vertical TPN DB with Modular Incomer [8537]



Highlights

- › Conforms to IEC 61439-1 & 3
- › IK 09-for double door DBs
- › Available in CRCA sheet steel, RAL 9003, powder coated
- › Ready to use DBs - Provided with insulated vertical phase bus-bars | neutral bar/s with shroud/s | earth bar/s | sticking saddles | cement spill protector | color-coded interconnecting wire set | cable ties | blanking plates and circuit identification labels
- › With provision for FP MCCB/Isolator/RCCB/RCBO as incomer and SP/ TP MCCBs as outgoing



Description	No. of Modules		Cat. Nos.	M.R.P. (₹) Per Unit
	Incomer	Outgoing		
IP 43 - Metal Door				
4 way	8	4+4+4	DEVTM004DD	14120
6 way	8	6+6+6	DEVTM006DD	15730
8 way	8	8+8+8	DEVTM008DD	18260
12 way	8	12+12+12	DEVTM012DD	24630
16 way	8	16+16+16	DEVTM016DD	29385
IP 54 - Metal Door				
4 way	8	4+4+4	DEVTM00454	29850
6 way	8	6+6+6	DEVTM00654	32565
8 way	8	8+8+8	DEVTM00854	35960

Vertical TPN DB with MCCB Incomer [8537]



Up to 250A MCCB Incomer

Description	No. of Modules		Cat. Nos.	M.R.P. (₹) Per Unit
	Incomer*	Outgoing		
IP 43 - Metal Door				
4 way	MCCB	4+4+4	DEVTH004DD	21700
6 way	MCCB	6+6+6	DEVTH006DD	24300
8 way	MCCB	8+8+8	DEVTH008DD	26725
12 way	MCCB	12+12+12	DEVTH012DD	32345
16 way	MCCB	16+16+16	DEVTH016DD	43465
IP 54 - Metal Door				
4 way	MCCB	4+4+4	DEVTH00454	39700
6 way	MCCB	6+6+6	DEVTH00654	43345
8 way	MCCB	8+8+8	DEVTH00854	44830

*Suitable for 3 pole and 4 pole DU250, DU250C & DN1 MCCB as incomer

Flexi/Row DB [8537]



Highlights

- › Conforms to IEC 61439-1 & 3
- › IK 09-for double door DBs
- › Available in CRCA sheet steel, RAL 9003, powder coated
- › Ready to use DBs - neutral bar/s with shroud/s | earth bar/s | sticking saddles | cement spill protector | cable ties | circuit identification labels
- › With provision to mount modular devices as per requirement



Description	No. of Modules Per Row	Cat. Nos.	M.R.P. (₹) Per Unit
IP 43 - Metal Door			
2 Row 28 Module	14	DEROW228DD	7295
3 Row 42 Module	14	DEROW342DD	8745
4 Row 56 Module	14	DEROW456DD	9510
4 Row 64 Module	16	DEROW464DD	11060

For ordering old DBs, replace Cat no with "DB" instead of "DE".
Eg. - New DB Cat no for SPN 12W DD - DESPN012DDS, Old DB Cat no for same will be DBSPN012DDS. Old DBs are available till stock last.

TPN Phase Selector DB [8537]



Highlights

- › Conforms to IEC 61439-1 & 3
- › IK 09-for double door DBs
- › Available in CRCA sheet steel, RAL 9003, powder coated
- › Ready to use DBs - Provided with 3 nos. of 63A E&A rotary switches | 3 nos. of rocker switches for phase identification | 100A insulated phase bus-bars | neutral bar/s with shroud/s | earth bar/s | sticking saddles | color-coded interconnecting wire set | cable ties | blanking plates and circuit identification labels
- › With provision for - FP MCB/Isolator/RCCB/RCBO as incomer and SP MCBs as outgoings




Description	No. of Modules		Cat. Nos.	M.R.P. (₹) Per Unit
	Incomer	Outgoing		
IP 43 - Metal Door				
4 way	8	4+4+4	DEPSR004DD	18380
6 way	8	6+6+6	DEPSR006DD	18675
8 way	8	8+8+8	DEPSR008DD	20005
10 way	8	10+10+10	DEPSR010DD	21375
12 way	8	12+12+12	DEPSR012DD	22535

EV charging DB 8537]



Highlights

- › Engineered specifically Charging application - 3.3 kW
- › Robust earth leakage, short circuit and overload protection with RCBO-
- › Factory fitted RCBO, switch and socket



Description	No. of Modules	Cat. Nos.	M.R.P. (₹) Per Unit
2 way EVDB	2	DEEVC002LD	*
4 way EVDB	4	DEEVC004LD	*

*For details, please contact nearest branch office

Enclosure [8537]



Highlights

- › Conforms to IEC 61439-1 & 3
- › Suitable for Surface and Flush mounting
- › Available in CRCA sheet steel, RAL9003, powder coated
- › With provision to mount MCB/Isolator/RCCB/RCBO and other modular devices



IP 30 - Metal Door

Description	No. of Modules	Cat. Nos.	M.R.P. (₹) Per Unit
IP 30 - Metal Door			
2 way	2	DEENC002SD	910
3 way	3	DEENC003SD	910
4 way	4	DEENC004SD	910
6 way	6	DEENC006SD	1410

For ordering old DBs, replace Cat no with "DB" instead of "DE".

Eq. - New DB Cat no for SPN 12W DD - DESPN012DDS, Old DB Cat no for same will be DBSPN012DDS. Old DBs are available till stock last.

Plug & Socket DB [8537]



Highlights

- › Conforms to IEC 61439-1 & 3
- › Suitable for Surface and Flush mounting
- › Available in CRCA sheet steel, RAL9003, powder coated
- › Loose Metal Plugs & Sockets conforms to IS 8804; available in Single Phase & Three Phase



Metal Plug & Socket

Plastic Plug & Socket

Description	No. of Pins	No. of Modules	Cat. Nos.	M.R.P. (₹) Per Unit
Metal Plug & Sockets				
10 A, 2 Pin + SC ^A	P + N	1	DEMPS110SD	2255
20 A, 2 Pin + SC ^A	P + N	1	DEMPS120SD	2425
20 A, 2 Pin + SC ^A	P + N	2	DEMPS220SD	2630
20 A, 3 Pin + SC ^A	3P	3	DEMPS320SD	4455
32 A, 3 Pin + SC ^A	3P	3	DEMPS332SD	5275
32 A, 3 Pin + SC ^A	3P	4	DEMPS432SD	5610
63 A, 5 Pin + SC ^A	3P+N+E	4	DEMPS463SD	19010
Plastic Plug & Sockets				
16 A, 3 Pin	P+N+E	2	DEPPS316SD	3690
32 A, 3 Pin	P+N+E	4	DEPPS332SD	3980
32 A, 5 Pin	3P+N+E	8	DEPPS532SD	6650
63 A, 5 Pin	3P+N+E	8	DEPPS563SD	16660

Metal Plug [8536]



Description	No. of Pins	Cat. Nos.	M.R.P. (₹) Per Unit
10 A, 2 Pin + SC ^A	P + N	MPS210P	280
20 A, 2 Pin + SC ^A	P + N	MPS220P	295
20 A, 3 Pin + SC ^A	3P	MPS320P	390
32 A, 3 Pin + SC ^A	3P	MPS332P	745

Note: Standard pack quantity - 20 nos.

Metal Socket [8536]



Description	No. of Pins	Cat. Nos.	M.R.P. (₹) Per Unit
10 A, 2 Pin + SC ^A	P + N	MPS210S	290
20 A, 2 Pin + SC ^A	P + N	MPS220S	320
20 A, 3 Pin + SC ^A	3P	MPS320S	440
32 A, 3 Pin + SC ^A	3P	MPS332S	745

^A SC-Scraping Earth

Note: Standard pack quantity - 20 nos.

DBs with provision for TV / Telephone splitters [8537]

New

Highlights

- › Distribution Boards equipped with provisions to mount TV / Telephone splitters
- › Available in SPN & TPN DBs
- › Communication DB equipped with provisions to mount 2 ONT, Spike guard, Data switch, TV / Telephone splitters



TV / Telephone



Communication DB

Cable End Boxes [8537]

Highlights

- › Available in CRCA sheet steel, RAL9003, powder coated
- › Can be either at the top or bottom of the distribution board

Description	Cat. Nos.	M.R.P. (₹) Per Unit
CEB for SPN DBs		
CEB-SPN Double Door, 4 way	DESPN004CBS	995
CEB-SPN Double Door, 6 way	DESPN006CBS	1075
CEB-SPN Double Door, 8 way	DESPN008CBS	1200
CEB-SPN Double Door, 12 way	DESPN012CBS	1335
CEB-SPN Double Door, 16 way	DESPN016CBS	1880
CEB-SPN Double Door, 18 way	DESPN018CBS	1940
CEB for TPN DBs		
CEB-TPE Double Door, 4 way	DETPE004CBS	1285
CEB-TPE Double Door, 6 way	DETPE006CBS	1835
CEB-TPN Double Door, 4 way	DETPN004CBS	1350
CEB-TPN Double Door, 6 way	DETPN006CBS	1890
CEB-TPN Double Door, 8 way	DETPN008CBS	2380
CEB-TPN Double Door, 12 way	DETPN012CBS	3955
CEB-TPN Double Door, 16 way	DETPN016CBS	3995
CEB for Horizontal PPI DBs		
CEB-Horz. PPI Double Door, 4 way	DEHPI004CB	1995
CEB-Horz. PPI Double Door, 6 way	DEHPI006CB	2490
CEB-Horz. PPI Double Door, 8 way	DEHPI008CB	3125
CEB-Horz. PPI Double Door, 12 way	DEHPI012CB	3920
CEB-Horz. PPI Double Door, 16 way	DEHPI016CB	4265
CEB for VTPN DBs		
CEB-VTPN Double Door, Modular Incomer	DEVTMXXXCB	1335
CEB-VTPN Double Door, MCCB Incomer	DEVTXXXCB	4715
CEB for Phase Segregated DBs		
CEB-PSG Double Door, 4 way	DEPSG004CB	3500
CEB-PSG Double Door, 6 way	DEPSG006CB	4170
CEB-PSG Double Door, 8 way	DEPSG008CB	4605
CEB-PSG Double Door, 12 way	DEPSG012CB	5125

DB Type	Description	No. of Modules		Cat. Nos.	M.R.P. (₹) Per Unit
		Incomer + Outgoing			
IP 43 - Metal Door					
SPN	6 way	2	4	DESPN006DDTV	5075
	8 way	2	6	DESPN008DDTV	5455
	12 way	2	10	DESPN012DDTV	6715
	16 way	2	14	DESPN016DDTV	7790
	18 way	2	16	DESPN018DDTV	9215
TPN	4 way	8	4+4+4	DETPN004DDTV	9975
	6 way	8	6+6+6	DETPN006DDTV	11525
	8 way	8	8+8+8	DETPN008DDTV	13740
Communication DB				DECOM01DD	*

*For details, please contact nearest branch office

DB Accessories

Busbar - Fork Type [8538]

Highlights

- › Available in Single Pole, Double Pole, Three Pole and Four Pole versions
- › Material : Copper



Description	Cat. Nos..	M.R.P. (₹) Per Unit	Std. Pack Qty.
SP 13 Mod	BSP13	445	5
SP 56 Mod	BSP56	1820	5
DP 12 Mod	BDP12	790	5
TP 12 Mod	BTP12	855	5
FP 12 Mod	BFP12	1690	5
End Caps for SP	ECP01	30	10
End Caps for DP/TP	ECP03	60	10
End Caps for FP	ECP04	100	10



Blanking Plates [8538]

Highlights

- › Available in One module and Half module

Description	Cat. Nos.	M.R.P. (₹) Per Unit	Std. Pack Qty.
One Module	BKP10	30	10
Half Module	BKP05	30	10



PDK02

Padlock [8301]

Highlights

- › Version with standard lock and a common key

Description	Cat. Nos.	M.R.P. (₹) Per Unit	Std. Pack Qty.
Lock and Key Kit	PDK02	775	5

For ordering old DBs, replace Cat no with "DB" instead of "DE".

Eg. - New DB Cat no for SPN 12W DD - DESPN012DDSD, Old DB Cat no for same will be DBSPN012DDSD. Old DBs are available till stock last.

General Terms

All prices are on Maximum retail price basis inclusive of all duties, GST & any other tax as applicable.

Warranty Policy

All products listed in the price list are covered by a warranty against manufacturing defects for a period of 18* months from the date of purchase. For Lauritz Knudsen MCBs & Isolators mounted inside Lauritz Knudsen Distribution Boards, an extended warranty of 5 years is provided.

In the event of a defect due to faulty workmanship or other associated reasons, we will, at our discretion, remedy the defect or replace the faulty parts or the entire product as soon as possible, free of cost.

However, the warranty is subject to proper usage, efficient maintenance, and does not cover defects arising from fire, accidents, inefficient maintenance, faulty operation, or deliberate or accidental damage. It also does not cover damage to power electronic components such as thyristors & IGBTs, which primarily fail due to overtemperature & over-voltage. Users need to take adequate precautions to eliminate these conditions. Manufacturer shall not be responsible & liable for any special, incidental, social or consequential (including lost profits) loss, consequential damages, injury or damages (punitive) of any kind solely attributable to defect or failure of its products. Manufacturer shall not be liable in any manner for the issue of or failure in the performance of other equipment the product is attached to.

Comprehensive Service Support

Lauritz Knudsen Electrical & Automation has over seven decades of experience in providing after sales service for low voltage distribution system in every type of industry & commercial complex in India

Lauritz Knudsen Electrical & Automation offers the following services, partnering you in your maintenance of low voltage distribution products:

- › Regular Maintenance
- › Preventive Maintenance Programme
- › On Call
- › Annual Maintenance Contract
- › Product Support for Managing Obsolescence-

Switchgear Training Centres



Pune

Lauritz Knudsen Electrical & Automation
Switchgear Training Centre
T-156 / 157, MIDC,
Bhosari, Pune - 411 026
Tel: 020-2712 0037 / 2712 0653
E-mail: STC-PUNE@LK-EA.com



Lucknow

Lauritz Knudsen Electrical & Automation
Switchgear Training Centre
C-6 & 7, UPSIDC,
P. O. Sarojininagar,
Lucknow - 226 008
Tel: 97944 54455
E-mail: STC-LUCKNOW@LK-EA.com



Delhi

Lauritz Knudsen Electrical & Automation
Switchgear Training Centre
A-25, Imperia Complex, First Floor
Mohan Cooperative Industrial Estate
Near Sarita Vihar / Mohan Estate Metro Station
Main Mathura Road, New Delhi - 110044
Tel: 9899020306 / 9720186726 / 9560845094
E-mail: STC-DELHI@LK-EA.com



Kolkata

Lauritz Knudsen Electrical & Automation
Switchgear Training Centre,
2nd Floor, Block BN3, Sector V,
Salt Lake City,
Kolkata - 700091, West Bengal
Tel: 7738717893 / 7797795567
E-mail: STC-KOLKATA@LK-EA.com



Vadodara

Lauritz Knudsen Electrical & Automation
Switchgear Training Centre
Behind L&T Knowledge City,
Near Village Ankhol,
Vadodara - 390019
Tel: 0265 6147805 / 6147808
E-mail: STC-VADODARA@LK-EA.com



Coonor

Lauritz Knudsen Electrical & Automation
Switchgear Training Centre
Ooty-Coonor Main Road
Yellanahalli P.O.,
The Nilgiris - 643 243
Tel: 0423 251 7107
E-mail: STC-COONOOR@LK-EA.com

Customer Interaction Center (CIC)
Phone no: 022 6932 7800
Web: www.LK-EA.com | e-mail: CIC@LK-EA.com



Electrical Standard Products (ESP) Offices

HEAD OFFICE

Lauritz Knudsen Electrical & Automation, A/600, Shil-Mahape Road, TTC Industrial Area, MIDC Thane, Navi Mumbai, 400 710, Maharashtra.

Tel: 022-6722 6300 | Fax: 022-6705 1112 | e-mail: CIC@LK-EA.com

BRANCH OFFICES

Lauritz Knudsen Electrical & Automation
C-201, The First Commercial Complex,
B/S Keshavbaug Party Plot, Vastrapur,
Ahmedabad - 380 015
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
Shri Daneshwari, 1st Floor,
Plot No. 17, 2nd Cross, Near Old Income
Tax Office Road, Vidyanagar,
Hubballi - 580 021
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
No.10, Fortuna Towers, 2nd Floor,
Rana Pratap Marg, Near NBRI,
Lucknow - 226 001
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
A06/A07, Second Floor,
Grand Chandra Complex, Frazer Road
Patna - 800 001
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
Wework Central, #36 Infantry Road,
Bengaluru - 560 001
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
AWFIS Space Solutions, Prestige Phoenix,
4th floor, 1405, Umanagar, Begumpet,
Hyderabad - 500 016
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
El Dorado Building, 3rd Floor, 6,
Venkatraman Street, Chinna Chokkikulam,
Madurai - 625 002
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
UrbanWrk, 5th Floor, Sai Radhe,
Raja Bahadur Mill Road, Behind Hotel
Grand Sheraton, Sangamwadi
Pune - 411 001
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
Work loop Unit-612, 6th Floor,
Esplanade One, Rasulgarh,
Bhubaneswar - 751 010
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
Workie, 214 - 2nd Floor,
Apollo Premier, PU-4,
Scheme No. 54, Vijay Nagar Square,
Indore - 452 010
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
Bestech Business Park,
Tower - A, 2nd floor, Sector - 66
Mohali - 160059
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
Office No. 211 & 212, Pithalia Plaza,
KK Road, Near Fafadih Chowk,
Raipur - 492 001
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
801 Word Level-8, No. 28,
SIDCO Industrial Estate, Guindy,
Chennai - 600 032
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
Office No. 430, 4th Floor,
Jaipur Electronic Market, Riddhi Siddhi,
Gopalpura Bypass,
Jaipur - 302 018
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
TC II, Tower B, PRIMA BAY Gate No. 5,
Saki Vihar Road Powai,
Mumbai - 400 072
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
DevX 4th Floor, A Wing, Om 9 Square,
150 Ft Ring Road, Near Nana Mava Circle,
Opp Silver Heights,
Rajkot - 360 001
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
Playworkz Coworking Space
43 & 44, 3rd Cross,
Bharathy Colony, Peelamedu,
Coimbatore - 641 004
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
GDR Siddha, Ground Floor, N Road
Bistupur, Opposite St. Mary's Church,
Jamshedpur - 831 001
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
Unnati Building, 2nd Floor,
Automation Campus, A-600, TTC Industrial
Area Shil-Mahape Road, Mahape,
Navi Mumbai - 400 710
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
10th Floor, Titanium Business,
Bhimrad Road, Althan
Surat - 395 017
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
3rd Floor, 1&2 Vijay Park,
Main Chakrata Road, Opp. Anandam,
Near Ballapur chowk,
Dehradun - 248 001
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
Business Communication Centre
2nd Floor, Chiramel Chambers,
Kurusipally Road, Ravipuram,
Kochi - 682 015
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
M1 & M2, Mezzanine Floor,
Himalaya Excellency,
Plot No. C-47, Pratap Nagar Square,
Nagpur - 440 022
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
11th Floor, Block-D, Notus IT Park,
Sarabhai Campus, Bhailal Amin Marg,
Vadodara - 390 023
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
Ground Floor, B-27,
Biplab Rashbihari Sarani,
Sector 2A, Bidhan Nagar,
Durgapur - 713 212
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
207, 2nd floor, Revolution Complex,
Station Road, E Ward,
Next to Pedestrian Bridge,
Kolhapur - 416 001
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
2nd Floor, Samarth House,
Opposite Titan World,
Samarth Nagar, Mahatma Nagar,
Nasik - 422 005
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
Qubexpro Business Centre,
4th Floor, V Mall, Above Lifestyles,
Factor Layout, Waltair Uplands,
Visakhapatnam - 530 003
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
6th Floor, Exotica Greens, A Block, 191,
R G Baruah Road, Guwahati Central,
Guwahati - 781 005
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
2nd Floor, BN3, Salt Lake, Sector-V,
Kolkata - 700 091
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
A-25, 1st Floor, Imperia Complex,
Mohan Corporate Industrial Estate,
Near Sarita Vihar Metro Station,
Mathura Road,
New Delhi - 110 044
Phone no: 022-6932 7800
e-mail: CIC@LK-EA.com

Product improvement is a continuous process. For the latest information and special application, please contact any of our offices listed here. Product photographs shown for representative purpose only.



Lauritz Knudsen Electrical & Automation, Electrical Standard Product

A/600, Shil-Mahape Road, TTC Industrial Area, MIDC Thane, Navi Mumbai, 400 710, Maharashtra, Phone No: 022-6722 6300 | Web: www.LK-EA.com

Customer Interaction Center (CIC)

Phone no: 022-6932 7800

Web: www.LK-EA.com | e-mail: CIC@LK-EA.com