



Electrical Standard Products
Lauritz Knudsen Electrical & Automation
A/600, Shil-Mahape Road, TTC Industrial Area, MIDC Thane, Mumbai, 400 710, Maharashtra
Customer Interaction Center (CIC)
Phone no: 022 6932 7800, E-mail: CIC@LK-EA.com, Website: smartshop.lk-ea.com



Scan the QR code
for any service, complaint
installation, or other support



**Discover the perfect blend of
legacy and innovation in MK.i DOL,
equipped with the Sz5-Auto SPPR**

MK.i DOL Starter

 **RELIABILITY**

 **PROTECTION**

 **STRENGTH**

 **HIGH PERFORMANCE**



Protection from
Single Phase, Phase
Reversal & Phase
Unbalance faults



Overload protection
through Thermal
Overload Relay



Auto/Manual/Bypass
mode of operation



In-built
ON Delay Timer



Equipped with
a In-built SPPR



External Access to
Emergency Rocker Switch
and Mode Switch




Manual lock for
OFF push button



Wide Band Coil



Dimensions

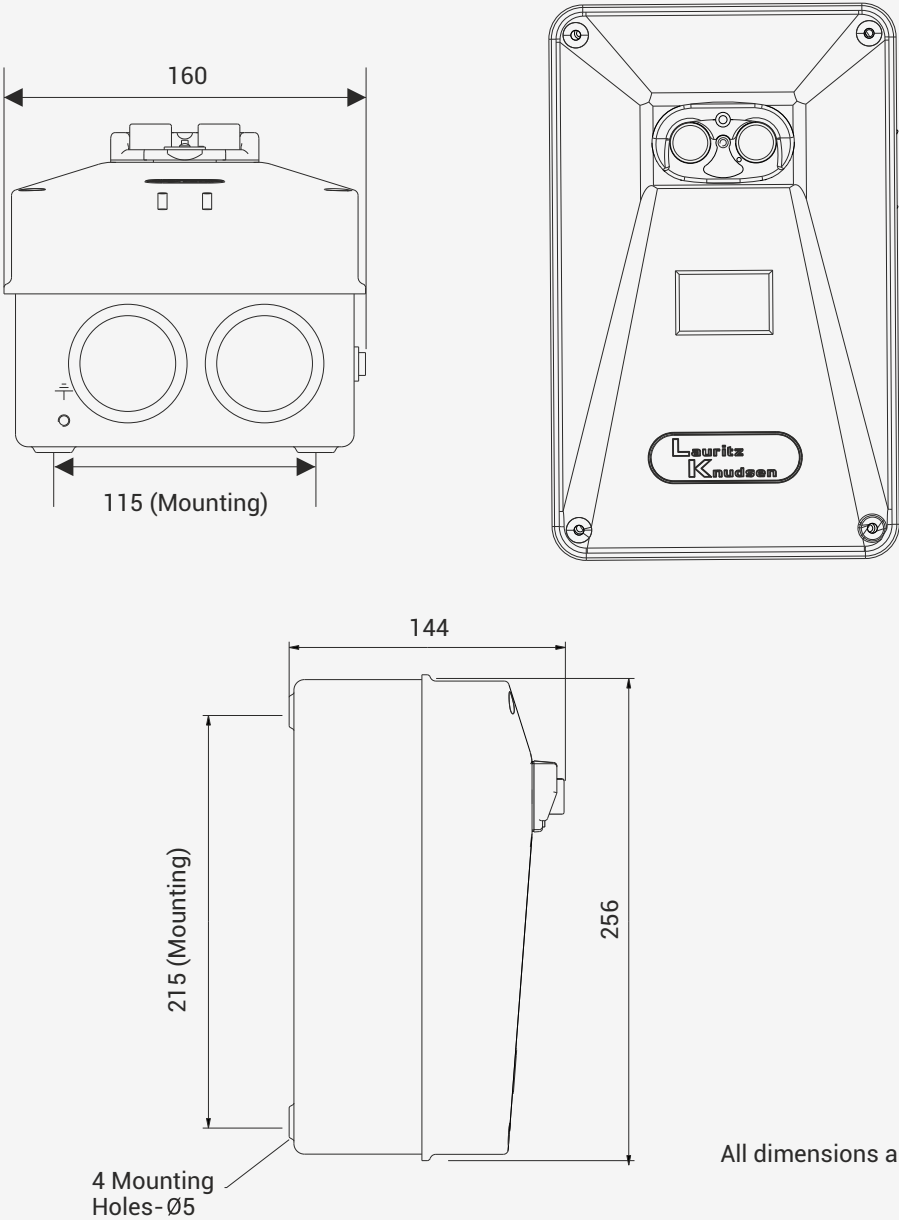

Range

Starter	Motor Rating (HP/KW) at 415V 3ph 50Hz)		Coil Voltage	Relay Range
MK1.i DOL	7.5 HP	5.5 KW	360V-W (200V-400V)	4-6.5A, 6-10A, 9-14A, 11-18A, 13-22A
MK2.i DOL	7.5 HP	5.5 KW	360V-W (200V-400V)	13-22A, 20-32A